



EV12-10(12V10Ah)



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	10Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 3.85 Kg (Tolerance ±4%)
Internal Resistance	Approx. 15.0 mΩ
Terminal	F1/F2
Max. Discharge Current	150A (5 sec)
Cold Cranking Ampere(CCA)	100A
Maximum Charging Current	3.0A
Reference Capacity	C3 7.80AH
	C5 8.60AH
	C10 9.40AH
	C20 10.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C
	Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



EV (Electric Vehicle) series is specially designed for frequent discharge deep cycle application. By using the specially designed active material, strong grids and thick plate construction, the EV series battery offers reliable performance in high load situations and could provide competitive cycle performance. Suitable for Electric Vehicle and Golf cart; Industrial equipment, Floor machines, Forklifts, Aerial lifts, and Robotics; Marine, RV, and no-idle solutions; Mobility and Medical equipment; and most outdoor application.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

Dimensions

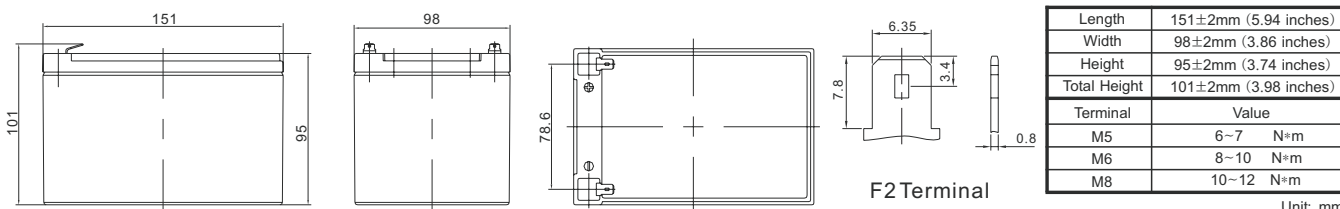

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	11.74	6.89	3.93	2.78	2.17	1.81	1.22	1.01	0.520
1.65V	11.49	6.76	3.86	2.73	2.14	1.79	1.21	1.00	0.515
1.70V	11.16	6.59	3.77	2.68	2.10	1.76	1.19	0.99	0.509
1.75V	10.72	6.35	3.65	2.60	2.05	1.72	1.17	0.97	0.500
1.80V	10.11	6.03	3.49	2.49	1.97	1.66	1.13	0.94	0.488
1.85V	9.25	5.57	3.25	2.34	1.86	1.58	1.08	0.91	0.470

Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	21.32	12.88	7.45	5.30	4.17	3.49	2.39	1.99	1.02
1.65V	21.18	12.77	7.38	5.25	4.13	3.47	2.37	1.97	1.02
1.70V	20.70	12.49	7.23	5.16	4.06	3.42	2.34	1.95	1.00
1.75V	20.08	12.10	7.03	5.03	3.97	3.35	2.29	1.91	0.99
1.80V	19.13	11.54	6.74	4.84	3.84	3.25	2.23	1.86	0.97
1.85V	17.68	10.73	6.31	4.56	3.64	3.09	2.13	1.79	0.93

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.



EV12-10(12V10Ah)




Charge Characteristic Curve for Cycle Use(IUUU)




Charge Characteristic Curve For Cycle Use(III)




Cycle Life in Relation to Depth of Discharge

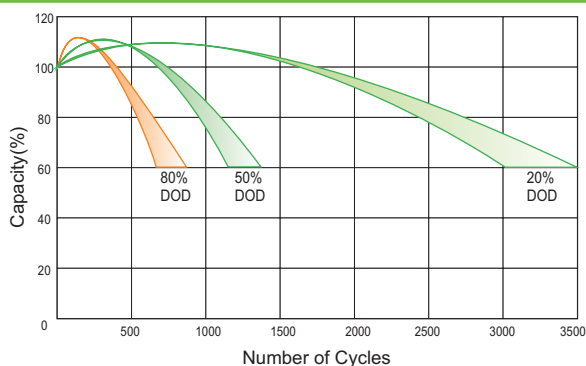

Storage Characteristics

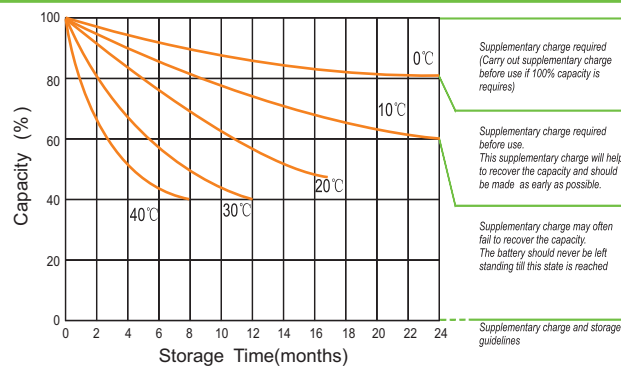

Discharge Characteristics Curve

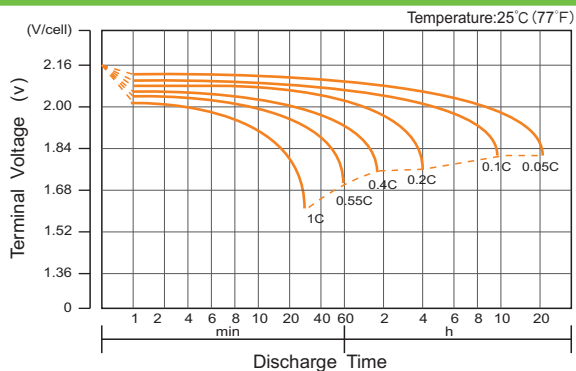


Relationship Between Charging Voltage and Temperature



Relationship of OCV And State of Charge(20°C)



Temperature Effects on Capacity

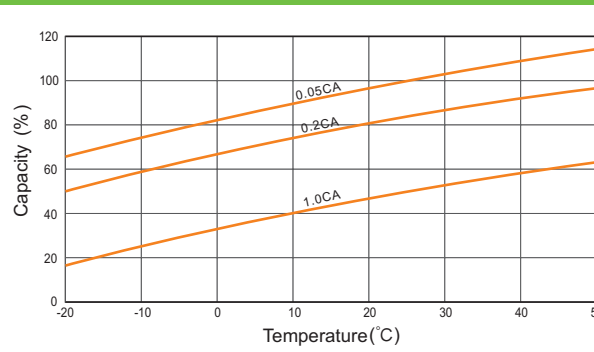

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.